




6" Depth EZ-FOLD™ Wall Mount Bracket, 4 RMS


I N S T A L L A T I O N I N S T R U C T I O N S

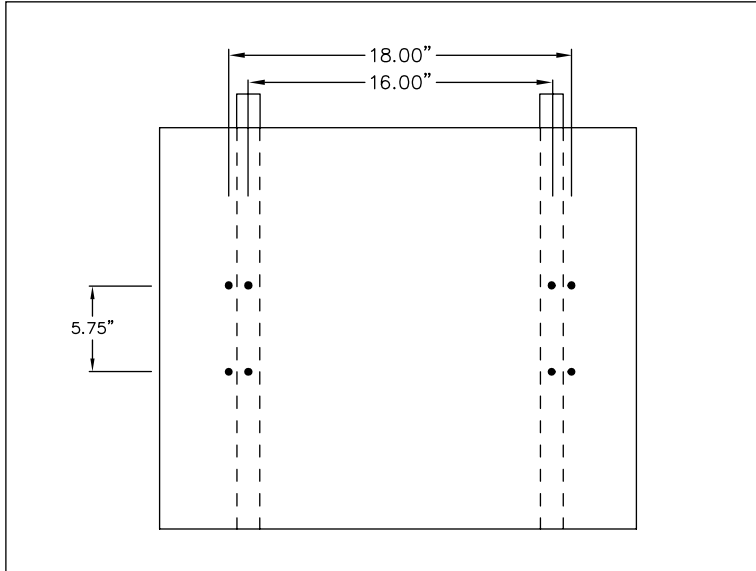


Step 1. Pre-drill screws onto the wall surface, but do not tighten completely.

- Use inner mounting holes positioned at 16.00" to secure bracket to studs.
- Use outer mounting holes positioned at 18.00" to secure bracket to board.


Note: Screws not included. It is recommended to use a level for accurate mounting.

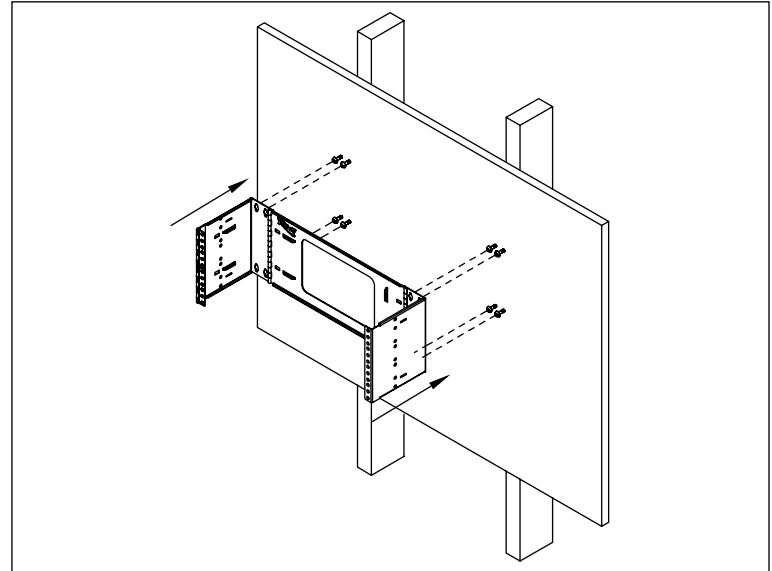

Step 2. Align mounting holes to the semi-tighten screws and mount the bracket. Tighten all screws securely before mounting equipment.

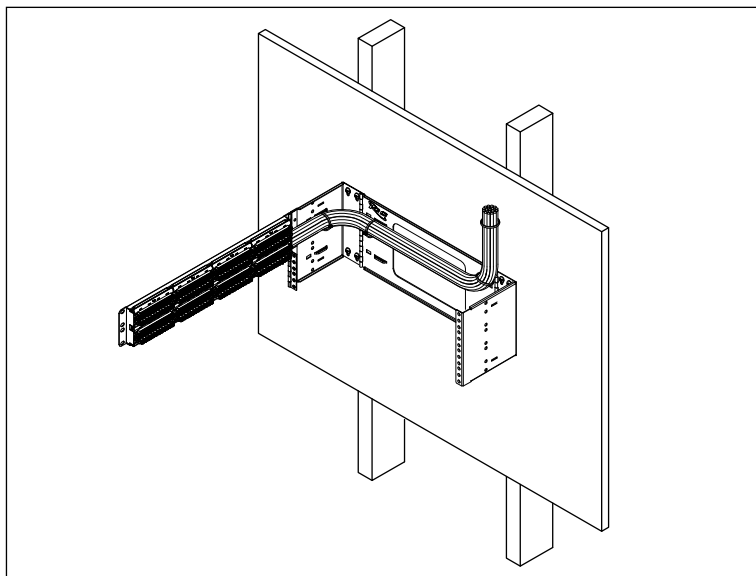

Step 3. Route and secure cable bundle(s) to the bracket as shown.

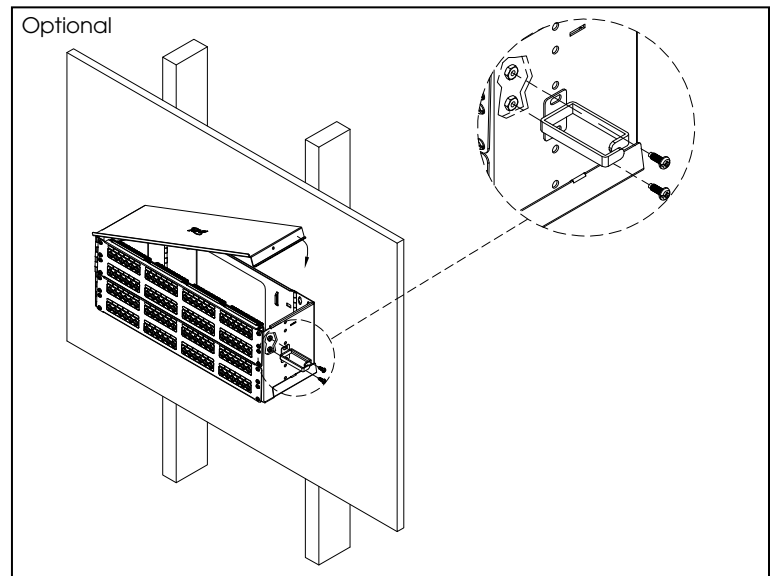


Optional

1. Complete installation by installing covers on top and bottom of bracket.
2. Metal rings can be mounted along the sides of the bracket for cable management. Note: To secure the rings, use #12-24 machine screw nut with lock washer or #12-24 flange nut. (Not sold by ICC)

6" Depth EZ-FOLD™ Wall Mount Bracket, 4 RMS

I N S T A L L A T I O N I N S T R U C T I O N S

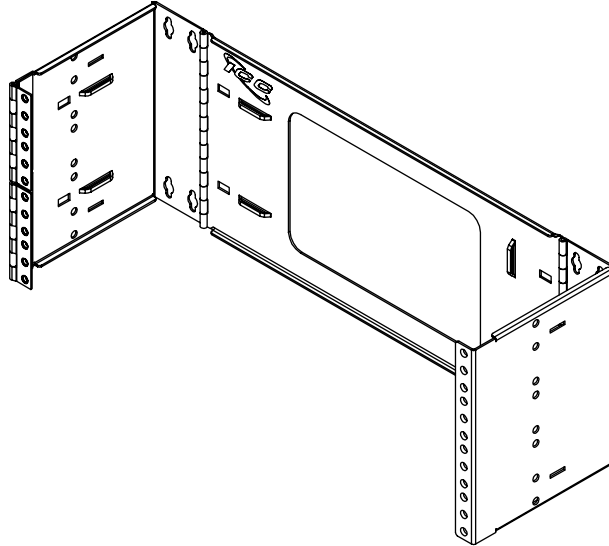


Item No.	Description	Rack Mount Spaces	Weight Capacity	#12-24 Screws
ICCMSABR64	19.30" L X 7.00" H X 6" D	4	30 lbs	16

F E A T U R E S A N D B E N E F I T S

- Designed with heavy duty steel supporting up to 30 lbs. of equipment
- Hinged every 2 rack mount spaces for easy maintenance
- 6" depth for network and phone equipments
- Cable tie anchors throughout for organizing cables
- Compatible with standard 19" width equipment and EIA-310-D hole pattern


O P T I O N A L A C C E S S O R I E S

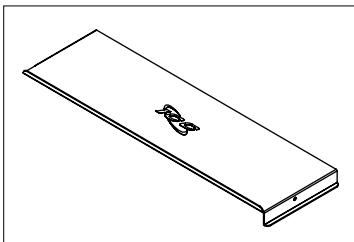

EZ-FOLD Wall Mount Bracket Cover

ICCMSHBCVR Top cover


- Mounts on top
- Helps protect equipment and cables
- Strong steel construction

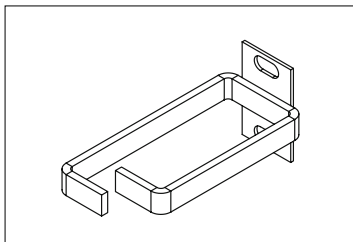

Metal Cable Management Rings

ICCMSCMPR1 1.70" Single, Vertical


- ICCMSCMPR2** 3" Single, Vertical
- Metal construction for durability
- Single sided rings

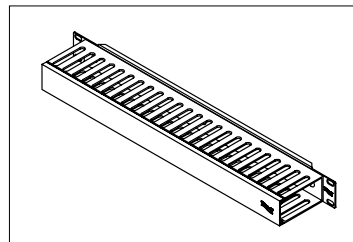

Single Horizontal Finger Ducts

ICCMSMA41 1.58" H x 3.15" D, 1 RMS

- ICCMSMA42** 3.15" H x 3.15" D, 2 RMS
- For front cable management
- Durable steel base with plastic fingers
- Includes slide-on cover

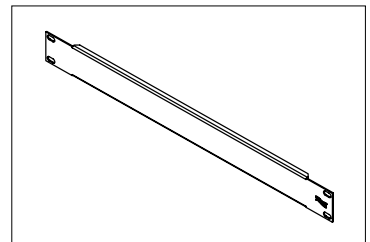

Blank Panels

ICCMSCMPB1 1.75" H x 19" W, 1 RMS

- ICCMSCMPB2** 3.50" H x 19" W, 2 RMS
- ICCMSCMPB3** 5.25" H x 19" W, 3 RMS
- Fills empty spaces between mounted equipment
- Strong steel construction